

GRACO Air Compressor RENTAL SERVICE

CAMERON TAC 2000 Rental Air Compressors

100% Oil Free,
Air Cooled,
Electric



gracoair.com

Ph. (832) RENT-AIR(832)
736-8247

CALL TODAY
FREE QUOTE

365 days
24 hours a day

Emergency Service
Planned Maintenance

Extraordinary
Price

SIZES		
250 HP	125 PSIG	1180 ICFM
300 HP	125 PSIG	1435 ICFM
350 HP	125 PSIG	1630 ICFM



Features and Benefits



Easy hookup and installation.	Only five connections required
Electric Motor-driven.	No emissions, no hazardous fuel, no permitting.
Air Cooled.	No cooling tower, no pumps, no glycol required
Oil-Free.	No oil carryover to contaminate your air system.
Low Maintenance.	Filters and cooler can be easily cleaned
High Reliability.	Cameron Turbocompressor, the most reliable compressor made.
Energy efficient.	Proven cost savings over diesel-fueled engines and oil-free rotary screw compressors.

Weights and Dimensions

• Trailer Specifications:

(Trailer is optional, limited availability)

Length: 18 ft. 8 in.

Width: 8 ft 6 in

GVWR: 16100 lb.

Hitch Type: Pintle eye 5-1/2" O.D. x 2-1/2" I.D.,
2-1/2"

height adjustable (+-)

Trailer is equipped with electric brakes and lights and is DOT approved for road travel. * Fig-1

10,000 ib. capacity drop-leg tongue jack is trailer-mounted. * Fig-2



Length: 9ft. 2 in.
Width: 6ft. 4 in.
Height: 7ft 8in
Lifting eyes provided on enclosure base, 3" I.D.,
4 places.
(Spreader bars are required if unit is to be lifted
by crane)



- Trailer with compressor mounted:

Height: 9 ft. 8 in
Weight: 12,500 lb.

Specifications and Instalation Requirements

- Power Requirements:

460V, 3 Phase, 60 Hz

- Motor Amps at Full Load:

250 HP	282 Amps
300 HP	336 Amps
350 HP	383 Amps



- Customer Connections:

Discharge Air:

3" NPT Dixon MaleSpud, ground Joint seal * **Fig-3**

GRACO-Supplied hoses and Connectors:

(4) 3" Air Hoses, 12.5 ft Long ea., 400 PSI working pressure * **Fig-4**

(3) Double spud unions, (1) Male Spud, (1) Female Spud * **Fig-5**

Electrical:

GRACO-Supplied electrical Cable:
 (3) 350 MCM cables, 25 ft Long ea., customer end bare
 "Hubbell" type connectors at compressor * **Fig-6**
 (1) 4/0 Ground wire with Lungs, 25 ft Long

**FREE QUOTE
 CALL NOW
 24 HOUR SERVICE
 (832) RENT-AIR**

Instrument Air:

3/8" NPT
 Requires dry, filtered instrument air to be supplied by customer.
 Pressure and flow requirements are as noted bellow:



Supply Pressure (PSIG)	Supply Flow (SCFM)
60	9.0
80	11.1
100	13.4
120	15.7

The TAC-2000 Cameron Turbo Air Cooled Centrifugal Compressor. The best technology available in the market for a reliable and efficient operation of all your 100% Oil Free Air needs.



Figure 1 - Pintle Eye

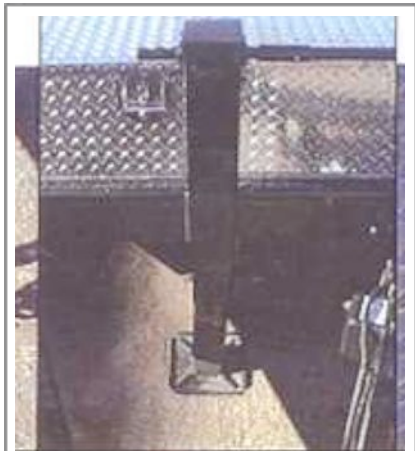


Figure 2 - Trailer Jack



Figure 3 - Air Discharge



Figure 4 - Air Hose

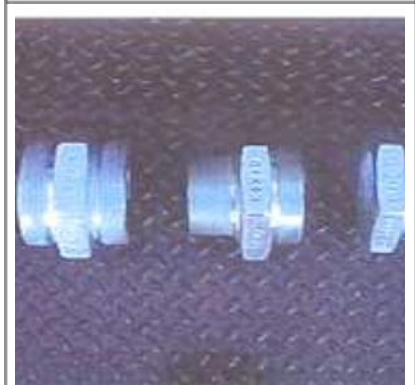


Figure 5 - Hose Connectors

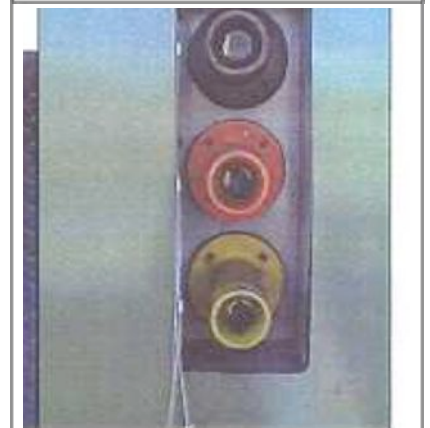


Figure 6 - Power Connection